

Mazak

QT Nexus 200 II
M/MS/MY/MSY -
16 Station



High-tech from heimatec - heimatec - Tools and systems for productive turning and milling

heimatec belongs to the international technology and quality leaders for precision tools and specializes in the development and production of high-precision static and live tools for all CNC lathes, CNC turn-/mill machines and CNC machining centers.

The range of products* spans from static BMT and VDI tool holders, live tools up to highly complex customer-specific individual solutions. heimatec, headquartered in Renchen, has a own subsidiary in Asia and India and numerous representatives as well as trading partners all over the world.

*OUR PRODCUTS

Static tool holders

Live tool units

Precision tools

Tools for turning and machining centres

Tools for swiss type lathes

Tool changing and uick-change systems

Tool systems for gear production

Digital tool management

This catalogue, including all its parts, is protected by copyright. Any use outside the restricted limitations of the Copyright Act without the consent of heimatec is inadmissible and liable to prosecution. This applies in particular to duplication, translation, microfilming and storage and processing in electronic systems.

heimatec GmbH reserves the right to make technical changes at any time without giving prior notice. This applies in particular to adjustments at any time to meet new or changed international standards, or in case of further developments of our products or manufacturing processes.

The current version of our General Terms and Conditions can be found on our website.

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|--------------------|
| 8 010 45 117 | Axial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 3.220 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 010 45 140 | Axial drilling and milling head ER 25 AX UT IC | |
| | Weight [kg]: | 3.260 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| 8 010 46 082 | Axial drilling and milling head HT 4 | |
| | Weight [kg]: | 3.300 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 011 45 005 | Axial milling head universal arbor 22 | |
| | Weight [kg]: | 3.460 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 019 44 009 | Axial milling head universal arbor 16 IC | |
| | Weight [kg]: | 5.840 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 16 |
| | Gear ratio [i]: | 2:1 |
| | Torque max [Nm]: | 80 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|--------------------|
| | Rotation max [1/min]: | 3000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Offset [mm]: | 50 |
| 8 019 45 028 | Axial drilling and milling head ER 25 AX UT | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 40 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 50 |
| 8 019 45 039 | Axial milling head universal arbor 22 | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 2:1 |
| | Torque max [Nm]: | 80 |
| | Rotation max [1/min]: | 3000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 45 115 | Axial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 5.530 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 45 116 | Axial drilling and milling head ER 25 AX UT IC | |
| | Weight [kg]: | 5.720 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|------------------|
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 45 119 | Axial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 6.630 |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 45 124 | Axial drilling and milling head ER 25 AX UT IC | |
| | Weight [kg]: | 6.720 |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 45 146 | Axial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 7.530 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:3 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 15000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 50 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------|
| 8 019 45 177 | Axial drilling and milling head ER 25 | |
| | Weight [kg]: | 5.720 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 46 032 | Axial drilling and milling head HT 4 | |
| | Weight [kg]: | 5.100 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 50 |
| 8 019 46 058 | Axial drilling and milling head HT 4 IC | |
| | Weight [kg]: | 5.390 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Offset [mm]: | 50 |
| 8 019 46 059 | Axial drilling and milling head HT 4 | |
| | Weight [kg]: | 6.000 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 50 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name |
|---------------------|---|
| 8 019 46 060 | Axial drilling and milling head ER 32 AX UT IC |
| | Weight [kg]: 5.680 |
| | Notation: offset |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 32 A - u-tec |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: IC/Ext |
| | Pressure max [bar]: 140 |
| | Please note: stronger bearing |
| 8 019 46 101 | Axial drilling and milling head ER 32 AX UT IC |
| | Weight [kg]: 7.130 |
| | Notation: offset |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 32 A - u-tec |
| | Gear ratio [i]: 1:2 |
| | Torque max [Nm]: 40 |
| | Rotation max [1/min]: 12000 |
| | Rotating direction: opposite |
| | Coolant: IC/Ext |
| | Pressure max [bar]: 140 |
| | Offset [mm]: 50 |
| 8 019 46 108 | Axial drilling and milling head ER 32 AX UT |
| | Weight [kg]: 5.500 |
| | Notation: offset |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 32 A - u-tec |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: EXT |
| | Please note: stronger bearing |
| | Offset [mm]: 50 |
| 8 019 46 120 | Axial drilling and milling head ER 32 AX UT IC |
| | Weight [kg]: 6.680 |
| | Notation: offset |
| | Employment for: Sub spindle |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 32 A - u-tec |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: IC/Ext |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|------------------|
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Offset [mm]: | 50 |
| 8 019 47 036 | Axial drilling and milling head HT 5 | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 5 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 50 |
| 8 019 47 037 | Axial drilling and milling head HT 5 IC | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 5 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Offset [mm]: | 50 |
| 8 030 45 042 | Radial drilling and milling head ER 25 AX IC | |
| | Weight [kg]: | 7.400 |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| | Center distance [mm]: | 100 |
| 8 030 45 047 | Radial drilling and milling head ER 25 | |
| | Weight [kg]: | 7.340 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |


QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------|
| | Center distance [mm]: | 100 |
| 8 030 45 051 | Radial drilling and milling head ER 25 | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:3 |
| | Torque max [Nm]: | 15 |
| | Rotation max [1/min]: | 18000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 030 45 069 | Radial drilling and milling head ER 25 | |
| | Weight [kg]: | 6.880 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 030 45 070 | Radial drilling and milling head ER 25 IC | |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |
| 8 030 45 102 | Radial drilling and milling head ER 25 IC | |
| | Weight [kg]: | 7.640 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------|
| 8 030 45 183 | Radial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 6.770 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 030 45 184 | Radial drilling and milling head ER 25 AX UT IC | |
| | Weight [kg]: | 7.320 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |
| 8 030 45 213 | Radial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 6.820 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 2:1 |
| | Torque max [Nm]: | 63 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 030 45 234 | Radial drilling and milling head ER 25 AX UT IC | |
| | Weight [kg]: | 8.340 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name |
|---|--|
| 8 030 45 297 | Radial drilling and milling head ER 25 AX UT IC |
| | Weight [kg]: 7.230 |
| | Employment for: Sub spindle |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 25 A - u-tec |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: IC/Ext |
| | Pressure max [bar]: 140 |
| | Center distance [mm]: 100 |
| 8 030 45 298 | Radial drilling and milling head ER 25 AX UT |
|  | Employment for: Sub spindle |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 25 A - u-tec |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: EXT |
| | Center distance [mm]: 100 |
| 8 030 45 313 | Radial drilling and milling head ER 25 AX UT |
| | Weight [kg]: 7.990 |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 25 A - u-tec |
| | Gear ratio [i]: 1:2 |
| | Torque max [Nm]: 16 |
| | Rotation max [1/min]: 12000 |
| | Rotating direction: opposite |
| | Coolant: EXT |
| | Please note: stronger bearing |
| | Center distance [mm]: 100 |
| 8 030 46 067 | Radial drilling and milling head ER 32 IC |
| | Weight [kg]: 7.800 |
| | Employment for: Main spindle |
| | Tool drive: Flat (~DIN 1809) |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: ER 32 |
| | Gear ratio [i]: 1:1 |
| | Torque max [Nm]: 50 |
| | Rotation max [1/min]: 6000 |
| | Rotating direction: opposite |
| | Coolant: IC/Ext |
| | Pressure max [bar]: 25 |
| | Center distance [mm]: 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------|
| 8 030 46 112 | Radial drilling and milling head HT 4 | |
| | Weight [kg]: | 6.880 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 030 46 165 | Radial drilling and milling head ER 32 AX UT IC | |
| | Weight [kg]: | 8.690 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 100 |
| 8 030 46 176 | Radial drilling and milling head HT 4 IC | |
| | Weight [kg]: | 7.390 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |
| 8 030 46 180 | Radial drilling and milling head HT 4 IC | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|--------------------|
| 8 030 46 312 | Radial drilling and milling head ER 32 AX UT | |
| | Weight [kg]: | 6.730 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 030 46 313 | Radial drilling and milling head ER 32 AX UT IC | |
| | Weight [kg]: | 7.350 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 100 |
| 8 031 44 018 | Radial milling head universal arbor 16 | |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 031 45 005 | Radial milling head universal arbor 22 | |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|--------------------|
| 8 031 45 009 | Radial milling head universal arbor 22 | |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 2:1 |
| | Torque max [Nm]: | 63 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 033 46 071 | Radial drilling and milling head HT 4 | |
| | Weight [kg]: | 8.480 |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 033 46 073 | Radial drilling and milling head HT 4 IC | |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| | Center distance [mm]: | 100 |
| 8 033 46 142 | Radial drilling and milling head ER 32 AX UT IC | |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|------------------------------------|
| 8 037 45 005 | Woodruff keycutter ER 25 AX | |
| | Weight [kg]: | 7.080 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A |
| | Gear ratio [i]: | 1333:1 |
| | Torque max [Nm]: | 32 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 037 49 010 | Radial disk mill head shaft diameter 10-25,4 | |
| | Weight [kg]: | 6.000 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Interchangeable arbor |
| | Gear ratio [i]: | 2,541:1 |
| | Torque max [Nm]: | 40 |
| | Rotation max [1/min]: | 2400 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Price without arbor |
| | Center distance [mm]: | 96,5 |
| 8 038 45 004 | Radial drilling and milling head ER 25 | |
| | Weight [kg]: | 5.320 |
| | Notation: | Y-axes adjustable |
| | Employment for: | Sub spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 039 45 011 | Radial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 7.490 |
| | Employment for: | Main- and sub spindle |
| | Version: | double spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same/opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|-----------------------|
| 8 039 45 014 | Radial drilling and milling head ER 25 AX | |
| | Weight [kg]: | 8.420 |
| | Employment for: | Main- and sub spindle |
| | Version: | double spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A |
| | Gear ratio [i]: | 1:3 |
| | Torque max [Nm]: | 12 |
| | Rotation max [1/min]: | 18000 |
| | Rotating direction: | same/opposite |
| | Coolant: | EXT |
| | Please note: | Special version |
| | Center distance [mm]: | 100 |
| 8 039 45 015 | Radial drilling and milling head ER 25 AX UT | |
| | Notation: | double spindle |
| | Employment for: | Main- and sub spindle |
| | Version: | Special |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | same/opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |
| 8 039 45 082 | Radial drilling and milling head ER 25 AX UT | |
| | Weight [kg]: | 6.640 |
| | Notation: | 9° angle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 039 46 020 | Radial drilling and milling head ER 32 AX UT | |
| | Weight [kg]: | 7.600 |
| | Employment for: | Main- and sub spindle |
| | Version: | double spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same/opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 100 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|-------------------|
| 8 040 44 039 | Universal head $\pm 90^\circ$ adjustable ER 16 AX UT | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 12 |
| | Rotation max [1/min]: | 12000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Note swivel range |
| | Center distance [mm]: | 87 |
| 8 040 44 052 | Universal head $\pm 90^\circ$ adjustable ER 16 AX UT | |
| | Weight [kg]: | 5.080 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Note swivel range |
| | Center distance [mm]: | 87 |
| 8 040 44 057 | Universal head $\pm 90^\circ$ adjustable ER 16 AX UT IC | |
| | Weight [kg]: | 5.150 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | Note swivel range |
| | Center distance [mm]: | 87 |
| 8 040 45 076 | Universal head $\pm 90^\circ$ adjustable ER 25 AX UT IC | |
| | Weight [kg]: | 5.340 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 87 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------|
| 8 040 45 079 | Universal head ± 90° adjustable ER 25 AX UT | |
| | Weight [kg]: | 5.320 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 87 |
| 8 050 44 037 | Multispindle drilling head ER 20 AX UT | |
| | Notation: | offset |
| | Version: | 2-spindles |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25/SP. |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | ± 30 |
| 8 050 45 029 | Multispindle drilling head ER 25 AX UT | |
| | Weight [kg]: | 5.200 |
| | Notation: | offset |
| | Version: | 2-spindles |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 32 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| 8 200 41 000 | Plug Ø 40x60 | |
| | Weight [kg]: | 1.140 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| 8 202 40 002 | Basic holder for height adjustable adapter | |
| | Weight [kg]: | 3.340 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Coolant: | EXT |


QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|-----------------------------|
| 8 202 40 005 | Basic holder for height adjustable adapter | |
| | Weight [kg]: | 3.300 |
| | Employment for: | Sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Coolant: | EXT |
| 8 202 40 008 | Basic holder longitudinal seat FN 12 | |
| | Weight [kg]: | 3.250 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Interface FN 12 |
| | Coolant: | EXT |
| | Center distance [mm]: | 40 |
| 8 214 43 003 | Cut-off holder SH 32 | |
| | Version: | Clampshaft on turret center |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |
| 8 214 43 013 | Cut-off holder SH 32 | |
| | Weight [kg]: | 3.470 |
| | Employment for: | Cut-off tool 32 |
| | Version: | Clampshaft on turret center |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |
| 8 214 43 014 | Cut-off holder SH 32 | |
| | Weight [kg]: | 3.470 |
| | Employment for: | Cut-off tool 32 |
| | Version: | Clampshaft on turret side |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |
| 8 214 43 018 | Cut-off holder SH 32 | |
| | Employment for: | Cut-off tool 32 |
| | Version: | Special |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|--|------------------------------------|
| 8 214 44 001 | Universal turning holder sq. 20 | |
| | Weight [kg]: | 5.460 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 20 |
| | Coolant: | EXT |
| 8 214 44 003 | Universal turning holder sq. 20 | |
| | Weight [kg]: | 5.320 |
| | Employment for: | Sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 20 |
| | Coolant: | EXT |
| 8 214 45 005 | Universal turning holder sq. 25 | |
| | Weight [kg]: | 5.180 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 25 |
| | Coolant: | EXT |
| 8 230 45 000 | Boring bar holder Ø 19 | |
| | Weight [kg]: | 7.780 |
| | Employment for: | Main spindle |
| | Version: | Special |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 19 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 56 mm |
| | Center distance [mm]: | 110 |
| 8 230 45 001 | Collet chuck holder ER 25 | |
| | Weight [kg]: | 6.780 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Coolant: | IC/Ext |
| | Please note: | Front edge clamping nut max. 91 mm |
| | Center distance [mm]: | 110 |
| 8 230 46 002 | Boring bar holder Ø 20 | |
| | Weight [kg]: | 5.260 |
| | Notation: | offset |
| | Employment for: | Sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 20 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 10 mm |
| | Center distance [mm]: | 120 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---|-----------------------------------|----------------------------------|
| 8 230 47 009 | Boring bar holder Ø 31,6 | |
| | Employment for: | Main spindle |
| | Version: | Special |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 31,6 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 56 mm |
| | Center distance [mm]: | 110 |
| 8 230 47 014 | Boring bar holder Ø 25 | |
| | Weight [kg]: | 6.460 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 25 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 56 mm |
| | Center distance [mm]: | 110 |
| 8 230 48 001 | Boring bar holder Ø 32 | |
| | Weight [kg]: | 6.260 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 32 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 56 mm |
| | Center distance [mm]: | 110 |
| 8 230 49 012 | Boring bar holder Ø 40 | |
|  | Weight [kg]: | 6.170 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 40 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 56 mm |
| | Center distance [mm]: | 110 |
| 8 230 49 059 | Boring bar holder Ø 40 | |
| | Weight [kg]: | 6.640 |
| | Notation: | offset |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 40 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension on center |
| | Center distance [mm]: | 110 |
| 8 234 44 000 | Combi facing holder sq. 20 | |
| | Weight [kg]: | 6.700 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 20 |
| | Coolant: | EXT |

QT Nexus 200 II M/MS/MY/MSY - 16 Station

| Part-# | Name | |
|---------------------|---|---------------------------------------|
| 8 234 44 007 | Combi facing holder sq. 20 | |
| | Weight [kg]: | 6.690 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 20 |
| | Coolant: | EXT |
| 8 239 45 001 | Double collet chuck holder ER 25 | |
| | Weight [kg]: | 8.160 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Coolant: | EXT |
| | Center distance [mm]: | 110 |
| 8 239 45 002 | Double collet chuck holder ER 25 | |
| | Weight [kg]: | 8.160 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Coolant: | IC/Ext |
| | Please note: | Front edge clamping nut max. 86/54 mm |
| | Center distance [mm]: | 110 |
| 8 239 46 001 | Double boring bar holder Ø 20 | |
| | Weight [kg]: | 7.120 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 20 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 60/10 mm |
| | Center distance [mm]: | 110 |
| 8 239 46 002 | Double boring bar holder Ø 20 | |
| | Weight [kg]: | 6.020 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 20 |
| | Coolant: | EXT |
| | Center distance [mm]: | 110 |
| 8 239 46 005 | Double tool holder HT 4 | |
| | Weight [kg]: | 6.000 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 60/30 mm |
| | Center distance [mm]: | 110 |

QT Nexus 200 II M/MS/MY/MSY - 16 Station


| Part-# | Name | |
|---------------------|---|--------------------------------------|
| 8 239 46 007 | Double collet chuck holder ER 32 | |
| | Weight [kg]: | 6.280 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 |
| | Coolant: | IC/Ext |
| | Please note: | Front edge clamping nut max 80/50 mm |
| | Center distance [mm]: | 110 |
| 8 239 46 031 | Double tool holder HT 4 | |
| | Weight [kg]: | 6.540 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 4 |
| | Coolant: | IC/Ext |
| | Please note: | Offset dimension to center 80/10 mm |
| | Center distance [mm]: | 110 |
| 8 239 47 026 | Double boring bar holder Ø 25 | |
| | Weight [kg]: | 6.600 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 25 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 110 |
| 8 239 48 006 | Double boring bar holder Ø 32 | |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 32 |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 100 |
| | Center distance [mm]: | 110 |
| 8 239 49 020 | Double boring bar holder Ø 40 | |
| | Weight [kg]: | 6.160 |
| | Employment for: | Main- and sub spindle |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 40 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 110 |
| 8 251 44 000 | Combi double turning holder sq. 20 | |
| | Weight [kg]: | 6.200 |
| | Shank size [mm]: | 40.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 20 |
| | | Sq. 20 |
| | | Sq. 20 |
| | | Sq. 20 |
| | Coolant: | EXT |

Mazak

QT Nexus 200 II M/MS/MY/MSY - 16 Station

heimatec®

| Part-# | Name |
|---------------------|---|
| 8 320 43 011 | Cut-off holder, height adjustable SH 32 IC |
| | Weight [kg]: 3.860 |
| | Shank size [mm]: 40.00 |
| | Shank type: VDI |
| | Tool adaption: Clampshaft SH 32 |
| | Coolant: IC/Ext |
| | Pressure max [bar]: 70 |

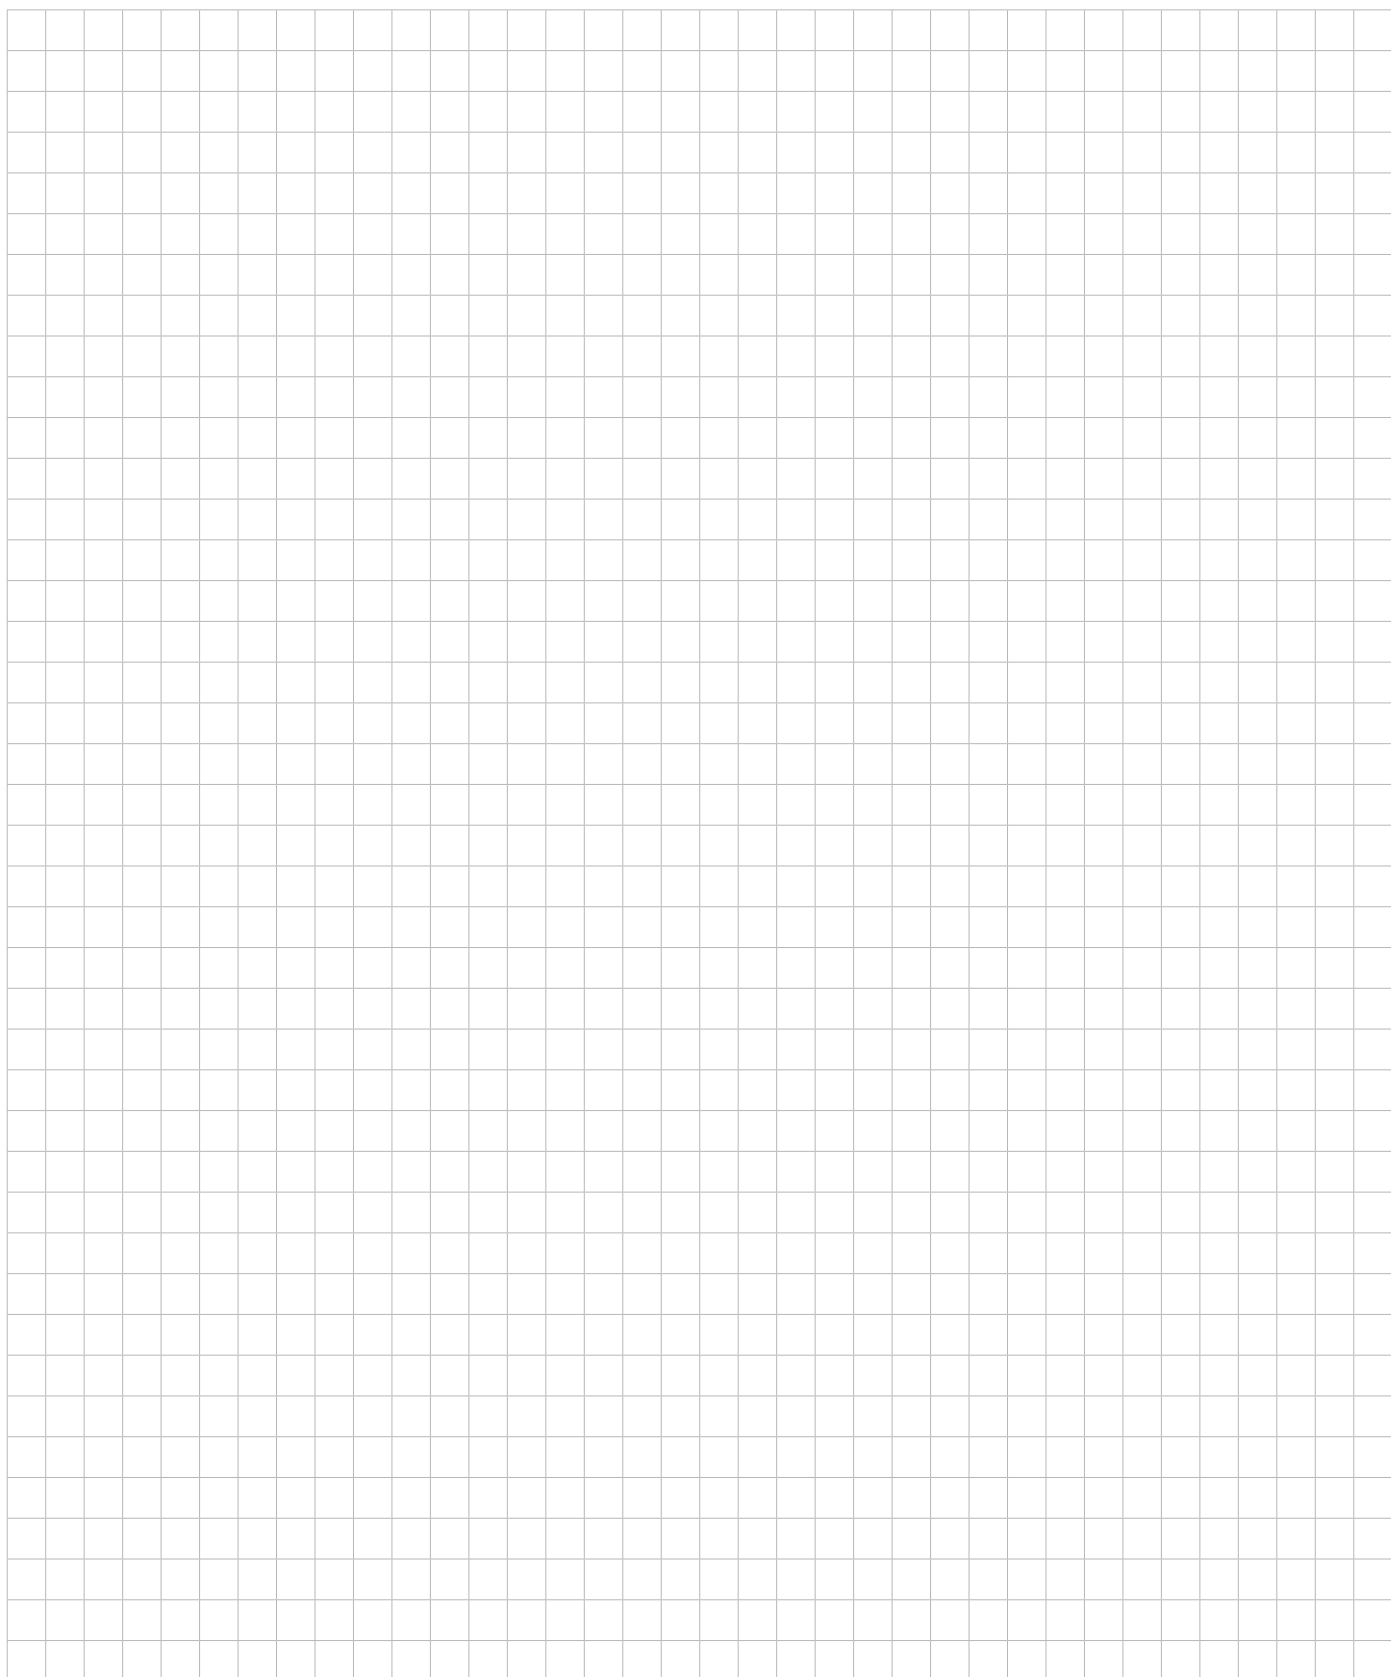

heimatec.u-tec®

heimatec.com

Products / Tool change systems /
u-tec® Tool-changing system



versions see catalog



heimatec.easy-quick

heimatec.com

Products / Tool change systems /
easy-quick HT quick-changing system



versions see catalog



heimatec.Capto™

heimatec.com

Products / Tool change systems /
heimatec.Capto™ quick-changing system



versions see catalog



heimatec.accessories

heimatec.com

Products / Accessories



versions see catalog





● heimatec overseas branches

○ global representations of heimatec

heimatec[®]

heimatec GmbH
 Präzisionswerkzeuge
 Carl-Benz-Str. 4
 77871 Renchen
 Germany

T +49 7843 9466 0
www.heimatec.com
info@heimatec.com

Please find the contact details of our worldwide trading partners on our website:
<https://heimatec.com/business-partners>