

SPINNER

TC 46-MC - VDI

20 DIN 5480

W10x0,8x11



High-tech from heimatec - heimatec - Tools and systems for productive turning and milling

heimatec belongs to the international technology and quality leaders for precision tools and specializes in the development and production of high-precision static and live tools for all CNC lathes, CNC turn-/mill machines and CNC machining centers.

The range of products* spans from static BMT and VDI tool holders, live tools up to highly complex customer-specific individual solutions. heimatec, headquartered in Renchen, has a own subsidiary in Asia and India and numerous representatives as well as trading partners all over the world.

*OUR PRODCUTS

Static tool holders

Live tool units

Precision tools

Tools for turning and machining centres

Tools for swiss type lathes

Tool changing and uick-change systems

Tool systems for gear production

Digital tool management

This catalogue, including all its parts, is protected by copyright. Any use outside the restricted limitations of the Copyright Act without the consent of heimatec is inadmissible and liable to prosecution. This applies in particular to duplication, translation, microfilming and storage and processing in electronic systems.

heimatec GmbH reserves the right to make technical changes at any time without giving prior notice. This applies in particular to adjustments at any time to meet new or changed international standards, or in case of further developments of our products or manufacturing processes.

The current version of our General Terms and Conditions can be found on our website.

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---|--|------------------------|
| 8 010 14 007 | Axial drilling and milling head ER 20 | |
|  | Weight [kg]: | 1.007 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 010 14 008 | Axial drilling and milling head ER 16 | |
|  | Weight [kg]: | 0.900 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 010 15 000 | Axial drilling and milling head Weldon 16 | |
|  | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Weldon (DIN 1835 b) 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 010 15 001 | Axial drilling and milling head HT 3 | |
|  | Weight [kg]: | 0.910 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 3 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 011 14 003 | Axial milling head universal arbor 16 | |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|--|-----------------------|
| | Coolant: | EXT |
| | Please note: | Stronger bearing |
| 8 011 14 005 | Axial milling head universal arbor 16 | |
| | Weight [kg]: | 0.980 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 011 15 000 | Axial milling head universal arbor 22 | |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 019 14 004 | Axial drilling and milling head ER 20 | |
| | Notation: | offset |
| | Employment for: | Main- and sub spindle |
| | Version: | double spindle |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| | Offset [mm]: | 87 |
| 8 019 14 006 | Axial drilling and milling head ER 20 | |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 16 |
| | Rotation max [1/min]: | 6300 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| | Offset [mm]: | 60 |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|--|-----------------------|
| 8 030 14 009 | Radial drilling and milling head ER 20 | |
| | Weight [kg]: | 1.480 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 50 |
| 8 030 14 010 | Radial drilling and milling head ER 16 | |
| | Weight [kg]: | 1.530 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 030 14 011 | Radial drilling and milling head ER 16 AX | |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 A |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 033 14 010 | Radial drilling and milling head ER 16 | |
| | Weight [kg]: | 2.140 |
| | Notation: | offset |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 037 19 005 | Radial disk mill head shaft diameter 5-16 | |
| | Weight [kg]: | 4.400 |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Interchangeable arbor |
| | Gear ratio [i]: | 2,889:1 |
| | Torque max [Nm]: | 30 |
| | Rotation max [1/min]: | 3000 |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|--|---|
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Price without arbor, max. milling cutter Ø 63 |
| | Center distance [mm]: | 72 |
| | Offset [mm]: | 46 |
| 8 038 14 002 | Radial drilling and milling head ER 20 | |
| | Weight [kg]: | 3.540 |
| | Notation: | offset |
| | Version: | right |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 20 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 039 14 006 | Radial drilling and milling head ER 16 AX | |
| | Notation: | 135° angle |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 A |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Special tool |
| | Offset [mm]: | 30 |
| 8 040 13 001 | Universal head ± 90° adjustable ER 11 AX | |
| | Weight [kg]: | 1.940 |
| | Version: | right |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 11 A |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| | Center distance [mm]: | 63 |
| 8 040 14 002 | Universal head ± 90° adjustable ER 16 | |
| | Weight [kg]: | 1.860 |
| | Version: | right |
| | Tool drive: | DIN 5480 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 10 |
| | Rotation max [1/min]: | 6000 |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|------------------------------------|------------------|
| | Rotating direction: | same |
| | Coolant: | EXT |
| | Center distance [mm]: | 63 |
| 8 200 10 000 | Tool holder A2-20x 70 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| 8 200 11 000 | Plug Z2-20 S | |
| | Weight [kg]: | 0.380 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| 8 200 11 001 | Plug Z2-20 K | |
| | Weight [kg]: | 0.030 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| 8 200 12 000 | Tool holder A1-20x 65 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| 8 208 19 000 | Set up holder 20x40x100 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| 8 210 11 000 | Tool holder F 20-MK 1 | |
| | Weight [kg]: | 0.720 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | DIN 228 D - MK 1 |
| | Coolant: | IC |
| 8 210 12 001 | Tool holder E2-20x 6 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 6 |
| | Coolant: | IC/Ext |
| 8 210 12 002 | Tool holder F 20-MK 2 | |
| | Weight [kg]: | 0.720 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | DIN 228 D - MK 2 |
| | Coolant: | IC |
| 8 210 13 001 | Tool holder E2-20x 8 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 8 |
| | Coolant: | IC/Ext |
| 8 210 13 002 | Short drill chuck VDI 20x 8 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Coolant: | EXT |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|---|--------|
| 8 210 13 003 | Short drill chuck VDI 20x 8 - IC | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Coolant: | IC |
| 8 210 13 005 | Tool holder E4-20xER 11 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 11 |
| | Coolant: | IC |
| 8 210 14 000 | Short drill chuck VDI 20x13 - IC | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Coolant: | IC |
| 8 210 14 001 | Tool holder E4-20xER 16 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 16 |
| | Coolant: | IC |
| 8 210 14 005 | Tool holder E2-20x10 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 10 |
| | Coolant: | IC/Ext |
| 8 210 14 007 | Tool holder E1-20x10 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 10 |
| | Coolant: | IC |
| 8 210 14 008 | Tool holder E1-20x12 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 12 |
| | Coolant: | IC |
| 8 210 14 009 | Short drill chuck VDI 20x13 | |
| | Weight [kg]: | 1.520 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Coolant: | EXT |
| 8 210 14 011 | Tool holder E1-20x14 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 14 |
| | Coolant: | IC |
| 8 210 14 012 | Tool holder E2-20x14 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 14 |
| | Coolant: | IC/Ext |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|--------------------------------|-----------------|
| 8 210 15 000 | Tool holder E2-20x16 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 16 |
| | Coolant: | IC/Ext |
| 8 210 15 001 | Tool holder E4-20xER 25 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 |
| | Coolant: | IC |
| 8 210 15 002 | Tool holder E1-20x16 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 16 |
| | Coolant: | IC |
| 8 210 15 005 | Tool holder E3-20x C 16 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | DIN 6388 - C 16 |
| | Coolant: | IC |
| 8 210 15 007 | Tool holder E2-20x18 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 18 |
| | Coolant: | IC/Ext |
| 8 210 15 008 | Tool holder HT 3 IC | |
| | Weight [kg]: | 0.590 |
| | Version: | right |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 3 |
| | Coolant: | IC/Ext |
| 8 210 16 000 | Tool holder E2-20x20 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 20 |
| | Coolant: | IC/Ext |
| 8 210 16 001 | Tool holder E1-20x20 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 20 |
| | Coolant: | IC |
| 8 210 16 003 | Tool holder E3-20x C 20 | |
| | Weight [kg]: | 0.680 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | DIN 6388 - C 20 |
| | Coolant: | IC |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|--------------------------------|-----------|
| 8 210 16 004 | Tool holder E4-20xER 32 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 |
| | Coolant: | IC |
| 8 210 17 000 | Tool holder E1-20x25 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 25 |
| | Coolant: | IC |
| 8 210 17 002 | Tool holder E2-20x25 | |
| | Weight [kg]: | 0.740 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 25 |
| | Coolant: | IC/Ext |
| 8 214 11 000 | Tool holder C1-20x16/55 | |
| | Weight [kg]: | 0.900 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 214 11 001 | Tool holder C1-20x16/50 | |
| | Weight [kg]: | 1.140 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 214 11 002 | Tool holder C3-20x16/55 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 214 11 003 | Tool holder C3-20x16/50 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 000 | Tool holder B1-20x16x30 | |
| | Weight [kg]: | 0.560 |
| | Employment for: | VDI 20 |
| | Version: | right |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11


| Part-# | Name | |
|---------------------|---------------------------------|---------------------------|
| 8 234 11 001 | Tool holder B3-20x16x30 | |
| | Weight [kg]: | 0.570 |
| | Employment for: | VDI 20 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 002 | Tool holder B3-20x16x40 | |
| | Weight [kg]: | 0.760 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 005 | Tool holder B1-20x16x40 | |
| | Weight [kg]: | 0.740 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 006 | Tool holder B5-20x16x30 | |
| | Weight [kg]: | 0.900 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 007 | Tool holder B5-20x16x40 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 008 | Tool holder B7-20x16x30 | |
| | Weight [kg]: | 0.730 |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 234 11 009 | Tool holder B7-20x16x40 | |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 16/12 |
| | Coolant: | EXT |
| 8 262 17 000 | Stock stop VDI 20 - Ø 28 | |
| | Weight [kg]: | 0.340 |
| | Notation: | rotating |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Please note: | Lenght adjustable 50-70mm |

SPINNER

TC 46-MC - VDI 20 DIN 5480 W10x0,8x11

| Part-# | Name | |
|---------------------|----------------------------------|---------------------------|
| 8 262 18 000 | Stock stop VDI 20 - Ø 35 | |
| | Notation: | rotating |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Please note: | Lenght adjustable 50-70mm |
| 8 262 19 000 | Stock stop VDI 20 - Ø 45 | |
| | Weight [kg]: | 0.530 |
| | Notation: | rotating |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |
| | Please note: | Lenght adjustable 50-70mm |
| 8 267 19 000 | Bar pick-up VDI 20 offset | |
| | Weight [kg]: | 1.250 |
| | Version: | right |
| | Shank size [mm]: | 20.00 |
| | Shank type: | VDI |



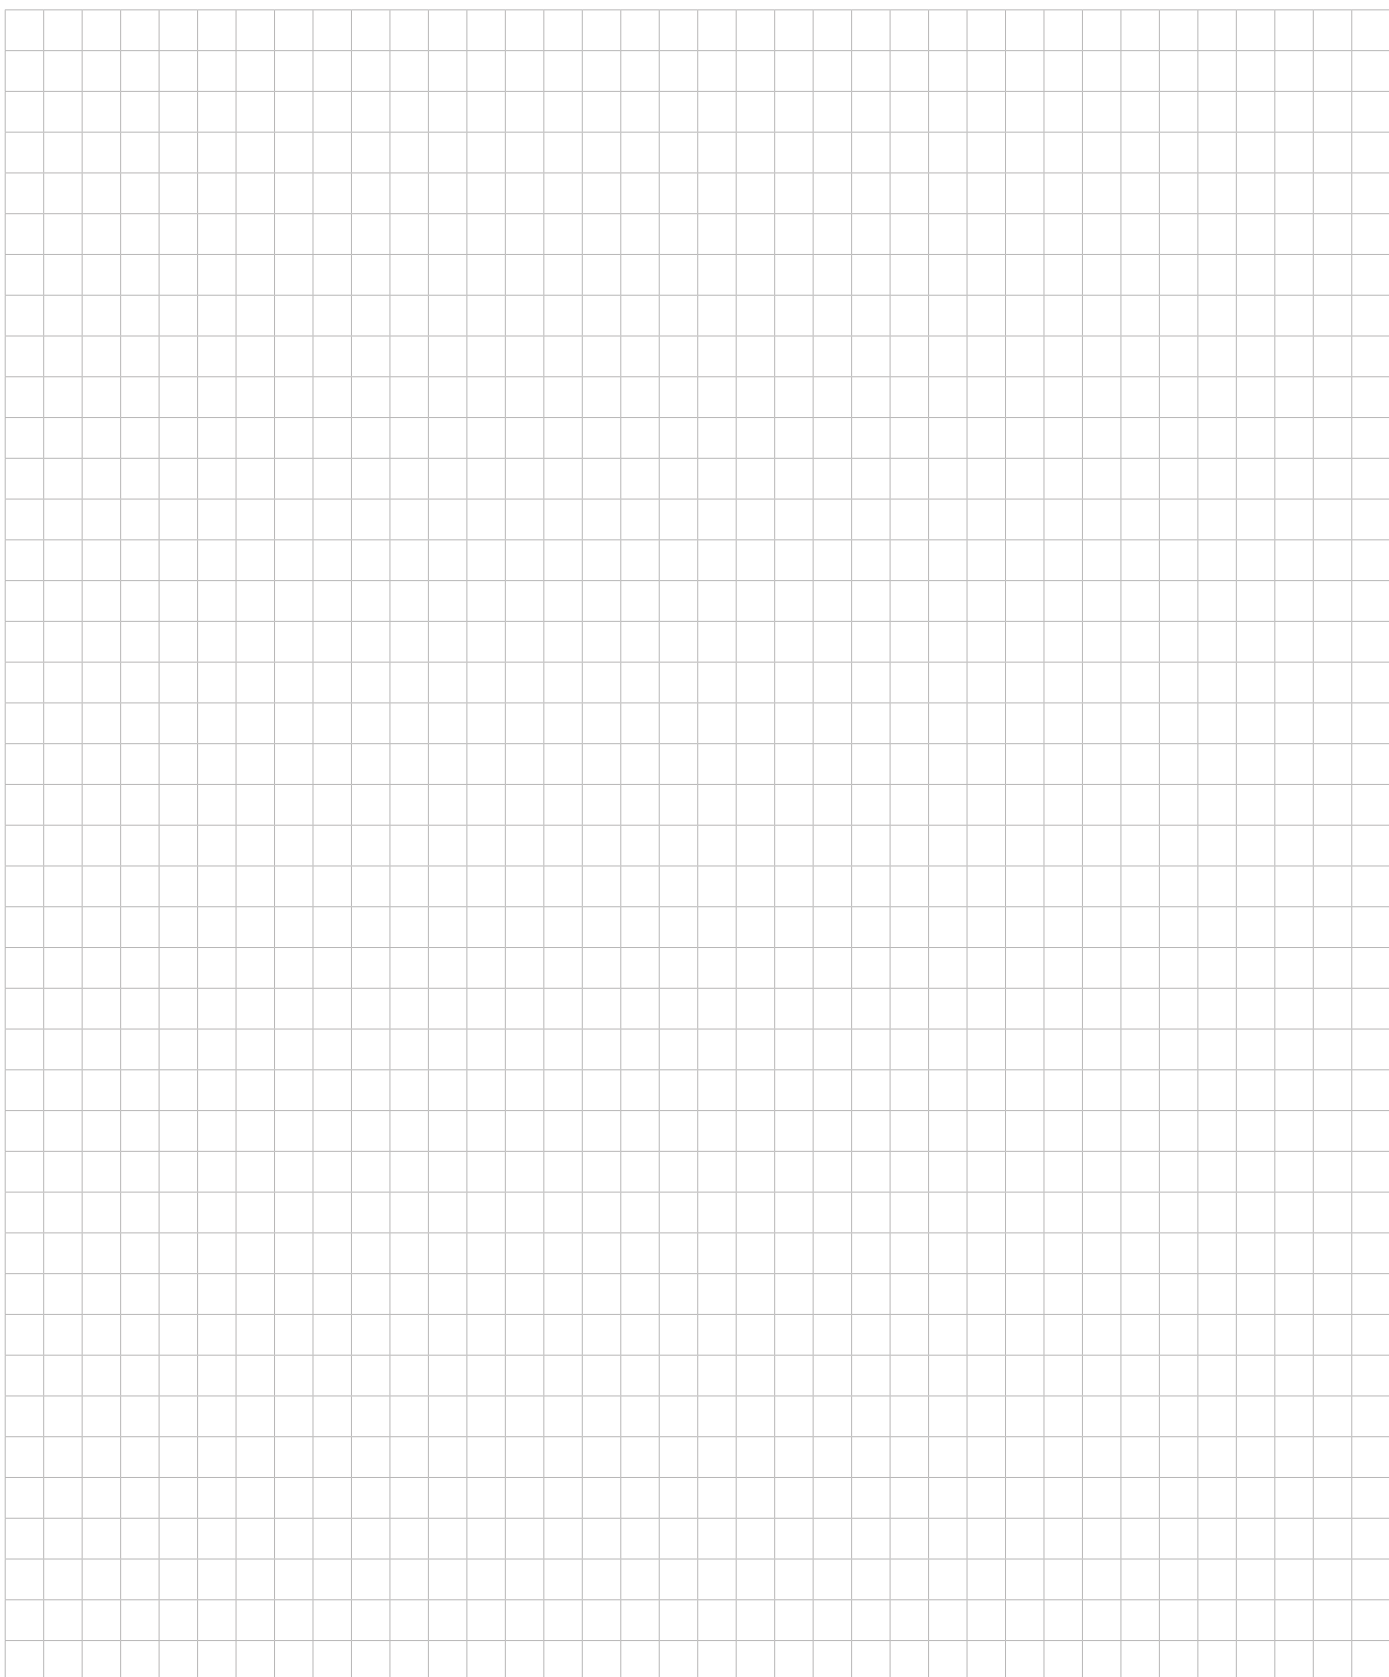

heimatec.u-tec®

heimatec.com

Products / Tool change systems /
u-tec® Tool-changing system



versions see catalog



heimatec.easy-quick

heimatec.com

Products / Tool change systems /
easy-quick HT quick-changing system



versions see catalog



heimatec.Capto™

heimatec.com

Products / Tool change systems /
heimatec.Capto™ quick-changing system



versions see catalog



heimatec.accessories

heimatec.com

Products / Accessories



versions see catalog





● heimatec overseas branches

○ global representations of heimatec

heimatec[®]

heimatec GmbH
Präzisionswerkzeuge
Carl-Benz-Str. 4
77871 Renchen
Germany

T +49 7843 9466 0
www.heimatec.com
info@heimatec.com

Please find the contact details of our worldwide trading partners on our website:
<https://heimatec.com/business-partners>