

Mazak

Slant Turn

Nexus 550 M



High-tech from heimatec - heimatec - Tools and systems for productive turning and milling

heimatec belongs to the international technology and quality leaders for precision tools and specializes in the development and production of high-precision static and live tools for all CNC lathes, CNC turn-/mill machines and CNC machining centers.

The range of products* spans from static BMT and VDI tool holders, live tools up to highly complex customer-specific individual solutions. heimatec, headquartered in Renchen, has a own subsidiary in Asia and India and numerous representatives as well as trading partners all over the world.

*OUR PRODCUTS

Static tool holders

Live tool units

Precision tools

Tools for turning and machining centres

Tools for swiss type lathes

Tool changing and uick-change systems

Tool systems for gear production

Digital tool management

This catalogue, including all its parts, is protected by copyright. Any use outside the restricted limitations of the Copyright Act without the consent of heimatec is inadmissible and liable to prosecution. This applies in particular to duplication, translation, microfilming and storage and processing in electronic systems.

heimatec GmbH reserves the right to make technical changes at any time without giving prior notice. This applies in particular to adjustments at any time to meet new or changed international standards, or in case of further developments of our products or manufacturing processes.


The current version of our General Terms and Conditions can be found on our website.

| Part-# | Name | |
|---------------------|---|-------------------------------|
| 8 010 57 020 | Axial drilling and milling head ER 40 IC | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| 8 010 57 085 | Axial drilling and milling head ER 40 AX UT IC | |
| | Weight [kg]: | 6.160 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | same |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| 8 011 55 010 | Axial milling head universal arbor 22 | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 22 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | same |
| | Coolant: | EXT |
| 8 018 56 000 | Axial drilling and milling head ER 32 | |
| | Weight [kg]: | 14.940 |
| | Notation: | Y-axes adjustable \pm 50 mm |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 CL |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 019 56 005 | Axial drilling and milling head ER 32 CL IC | |
| | Weight [kg]: | 14.220 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |

| Part-# | Name | |
|---------------------|--|------------------|
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Offset [mm]: | 75 |
| 8 019 57 000 | Axial drilling and milling head ER 40 CL | |
| | Weight [kg]: | 14.240 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 75 |
| 8 019 57 005 | Axial drilling and milling head CAT 40 | |
| | Weight [kg]: | 12.160 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | CAT 40 - SK 40 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Offset [mm]: | 75 |
| 8 019 57 010 | Axial drilling and milling head ER 40 CL IC | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 |
| | Gear ratio [i]: | 1:1,5 |
| | Torque max [Nm]: | 63 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| | Offset [mm]: | 75 |
| 8 019 57 012 | Axial drilling and milling head CAT 40 | |
| | Weight [kg]: | 12.160 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | CAT 40 - SK 40 |
| | Gear ratio [i]: | 1:1,5 |
| | Torque max [Nm]: | 63 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |

| Part-# | Name | |
|---------------------|---|---------------------|
| | Coolant: | EXT |
| | Offset [mm]: | 75 |
| 8 019 57 047 | Axial drilling and milling head ER 40 AX UT IC | |
| | Weight [kg]: | 13.800 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Offset [mm]: | 75 |
| 8 019 57 049 | Axial drilling and milling head ER 40 AX UT | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| 8 019 57 075 | Axial drilling and milling head CAT 40 inch | |
| | Weight [kg]: | 12.330 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | CAT 40 - SK 40 inch |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 75 |
| 8 019 58 002 | Axial drilling and milling head HT 6 | |
| | Weight [kg]: | 12.940 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 6 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 75 |

| Part-# | Name | |
|---------------------|--|------------------|
| 8 019 58 003 | Axial drilling and milling head HT 6 IC | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 6 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 75 |
| 8 019 59 000 | Axial drilling and milling head HT 7 IC | |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 7 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 50 |
| | Rotation max [1/min]: | 8000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 75 |
| 8 019 59 002 | Axial drilling and milling head HT 7 | |
| | Weight [kg]: | 13.440 |
| | Notation: | offset |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 7 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Offset [mm]: | 75 |
| 8 030 57 016 | Radial drilling and milling head CAT 40 | |
| | Weight [kg]: | 14.600 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | CAT 40 - SK 40 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 160 |

| Part-# | Name | |
|---|--|------------------------|
| 8 030 57 045 | Radial drilling and milling head HT 5 IC | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 5 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| | Center distance [mm]: | 160 |
| 8 030 57 068 | Radial drilling and milling head C 5 IC | |
|  | Weight [kg]: | 17.350 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | heimatec Capto(TM) C 5 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 160 |
| 8 030 57 077 | Radial drilling and milling head ER 40 AX UT IC | |
| | Weight [kg]: | 17.420 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 160 |
| 8 030 57 078 | Radial drilling and milling head ER 40 AX UT | |
| | Weight [kg]: | 16.380 |
| | Employment for: | Main spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 6000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |

| Part-# | Name | |
|---------------------|--|------------------|
| | Center distance [mm]: | 160 |
| 8 030 57 082 | Radial drilling and milling head ER 40 AX UT IC | |
| | Employment for: | Main spindle |
| | Version: | Special |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 40 |
| | Rotation max [1/min]: | 8000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 140 |
| 8 030 57 119 | Radial drilling and milling head ER 40 AX UT | |
| | Weight [kg]: | 14.890 |
| | Employment for: | Main spindle |
| | Version: | Special |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 40 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 100 |
| 8 030 58 011 | Radial drilling and milling head HT 6 IC | |
| | Weight [kg]: | 16.150 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 6 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Center distance [mm]: | 160 |
| 8 030 58 012 | Radial drilling and milling head HT 6 | |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 6 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 40 |
| | Rotation max [1/min]: | 8000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |

| Part-# | Name | |
|---------------------|--|-------------------------------|
| | Center distance [mm]: | 160 |
| 8 030 58 014 | Radial drilling and milling head Weldon 32 IC | |
| | Weight [kg]: | 15.920 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Weldon (DIN 1835 b) 32 |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 25 |
| | Center distance [mm]: | 160 |
| 8 030 59 000 | Radial drilling and milling head HT 7 IC | |
| | Weight [kg]: | 17.560 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | HT 7 |
| | Gear ratio [i]: | 1:2 |
| | Torque max [Nm]: | 40 |
| | Rotation max [1/min]: | 8000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | stronger bearing |
| | Center distance [mm]: | 160 |
| 8 031 54 019 | Radial milling head universal arbor 1/2" | |
| | Weight [kg]: | 15.260 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Universal arbor 1/2" (12,7mm) |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 160 |
| 8 039 56 027 | Radial drilling and milling head ER 32 AX UT | |
| | Weight [kg]: | 14.830 |
| | Employment for: | Main- and sub spindle |
| | Version: | double spindle |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 32 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 100 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | same/opposite |
| | Coolant: | EXT |
| | Center distance [mm]: | 160 |

| Part-# | Name | |
|---------------------|---|-------------------------------------|
| 8 040 55 009 | Universal head ± 90° adjustable ER 25 AX UT | |
| | Weight [kg]: | 6.570 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | EXT |
| | Please note: | Note swivel range! stronger bearing |
| | Center distance [mm]: | 87 |
| 8 040 55 021 | Universal head ± 90° adjustable ER 25 AX UT IC | |
| | Weight [kg]: | 6.540 |
| | Tool drive: | Flat (~DIN 1809) |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ER 25 A - u-tec |
| | Gear ratio [i]: | 1:1 |
| | Torque max [Nm]: | 25 |
| | Rotation max [1/min]: | 4000 |
| | Rotating direction: | opposite |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 140 |
| | Please note: | Note swivel range! stronger bearing |
| | Center distance [mm]: | 87 |
| 8 200 51 007 | Plug Ø 50x75 | |
| | Weight [kg]: | 2.020 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| 8 202 50 003 | Basic holder longitudinal seat FN 12 | |
| | Weight [kg]: | 5.040 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Interface FN 12 |
| | Coolant: | EXT |
| | Center distance [mm]: | 58 |
| 8 214 53 000 | Cut-off holder SH 32 | |
| | Employment for: | Cut-off tool 32 |
| | Version: | Clampshaft on turret center |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |
| 8 214 53 001 | Cut-off holder SH 32 | |
| | Weight [kg]: | 4.890 |
| | Employment for: | Cut-off tool 32 |
| | Version: | Clampshaft on turret side |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |

| Part-# | Name | |
|---------------------|--|------------------------|
| | Coolant: | EXT |
| | Please note: | demountalbe clampshaft |
| 8 214 55 001 | Universal turning holder sq. 25 | |
| | Weight [kg]: | 11.070 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 25 |
| | Coolant: | EXT |
| 8 214 55 007 | Universal turning holder sq. 1" | |
| | Weight [kg]: | 11.040 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 1" (25,4mm) |
| | Coolant: | EXT |
| 8 214 56 000 | Universal turning holder sq. 32 | |
| | Weight [kg]: | 12.000 |
| | Employment for: | Main spindle |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 32 |
| | Coolant: | EXT |
| 8 230 57 000 | Tool holder ABS 80 IC | |
| | Weight [kg]: | 18.920 |
| | Notation: | offset |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | ABS 80 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 58 001 | Boring bar holder Ø 32 | |
| | Weight [kg]: | 14.460 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 32 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 58 004 | Boring bar holder Ø 32 | |
| | Notation: | offset |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 32 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |


| Part-# | Name | |
|---------------------|---|---------------|
| 8 230 59 000 | Boring bar holder Ø 50 | |
| | Weight [kg]: | 14.140 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 50 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 59 001 | Boring bar holder Ø 40 | |
| | Weight [kg]: | 14.220 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 40 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 59 009 | Boring bar holder Ø 40 | |
| | Notation: | offset |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 40 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 59 011 | Boring bar holder Ø 60 | |
| | Weight [kg]: | 14.240 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 60 |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 59 016 | Boring bar holder Ø 2" | |
| | Weight [kg]: | 14.070 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 2" (50,8mm) |
| | Coolant: | IC/Ext |
| | Center distance [mm]: | 175 |
| 8 230 59 029 | Boring bar holder Ø 50 - slotted | |
| | Weight [kg]: | 19.950 |
| | Version: | slotted |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Ø 50 |
| | Coolant: | EXT |
| | Center distance [mm]: | 175 |
| 8 234 55 000 | Combi facing holder sq. 25 | |
| | Weight [kg]: | 12.960 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 25 |
| | Coolant: | EXT |

Mazak

Slant Turn Nexus 550 M

heimatec®

| Part-# | Name | |
|---------------------|---|---------------------|
| 8 234 56 000 | Combi facing holder sq. 32 | |
| | Weight [kg]: | 15.150 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Sq. 32 |
| | Coolant: | EXT |
| 8 320 53 008 | Cut-off holder, height adjustable SH 32 IC | |
| | Weight [kg]: | 5.650 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 70 |
| 8 320 53 010 | Cut-off holder, height adjustable SH 32 IC | |
| | Weight [kg]: | 5.810 |
| | Shank size [mm]: | 50.00 |
| | Shank type: | VDI |
| | Tool adaption: | Clampshaft SH 32 |
| | Coolant: | IC/Ext |
| | Pressure max [bar]: | 70 |
| | Please note: | Clampshaft internal |

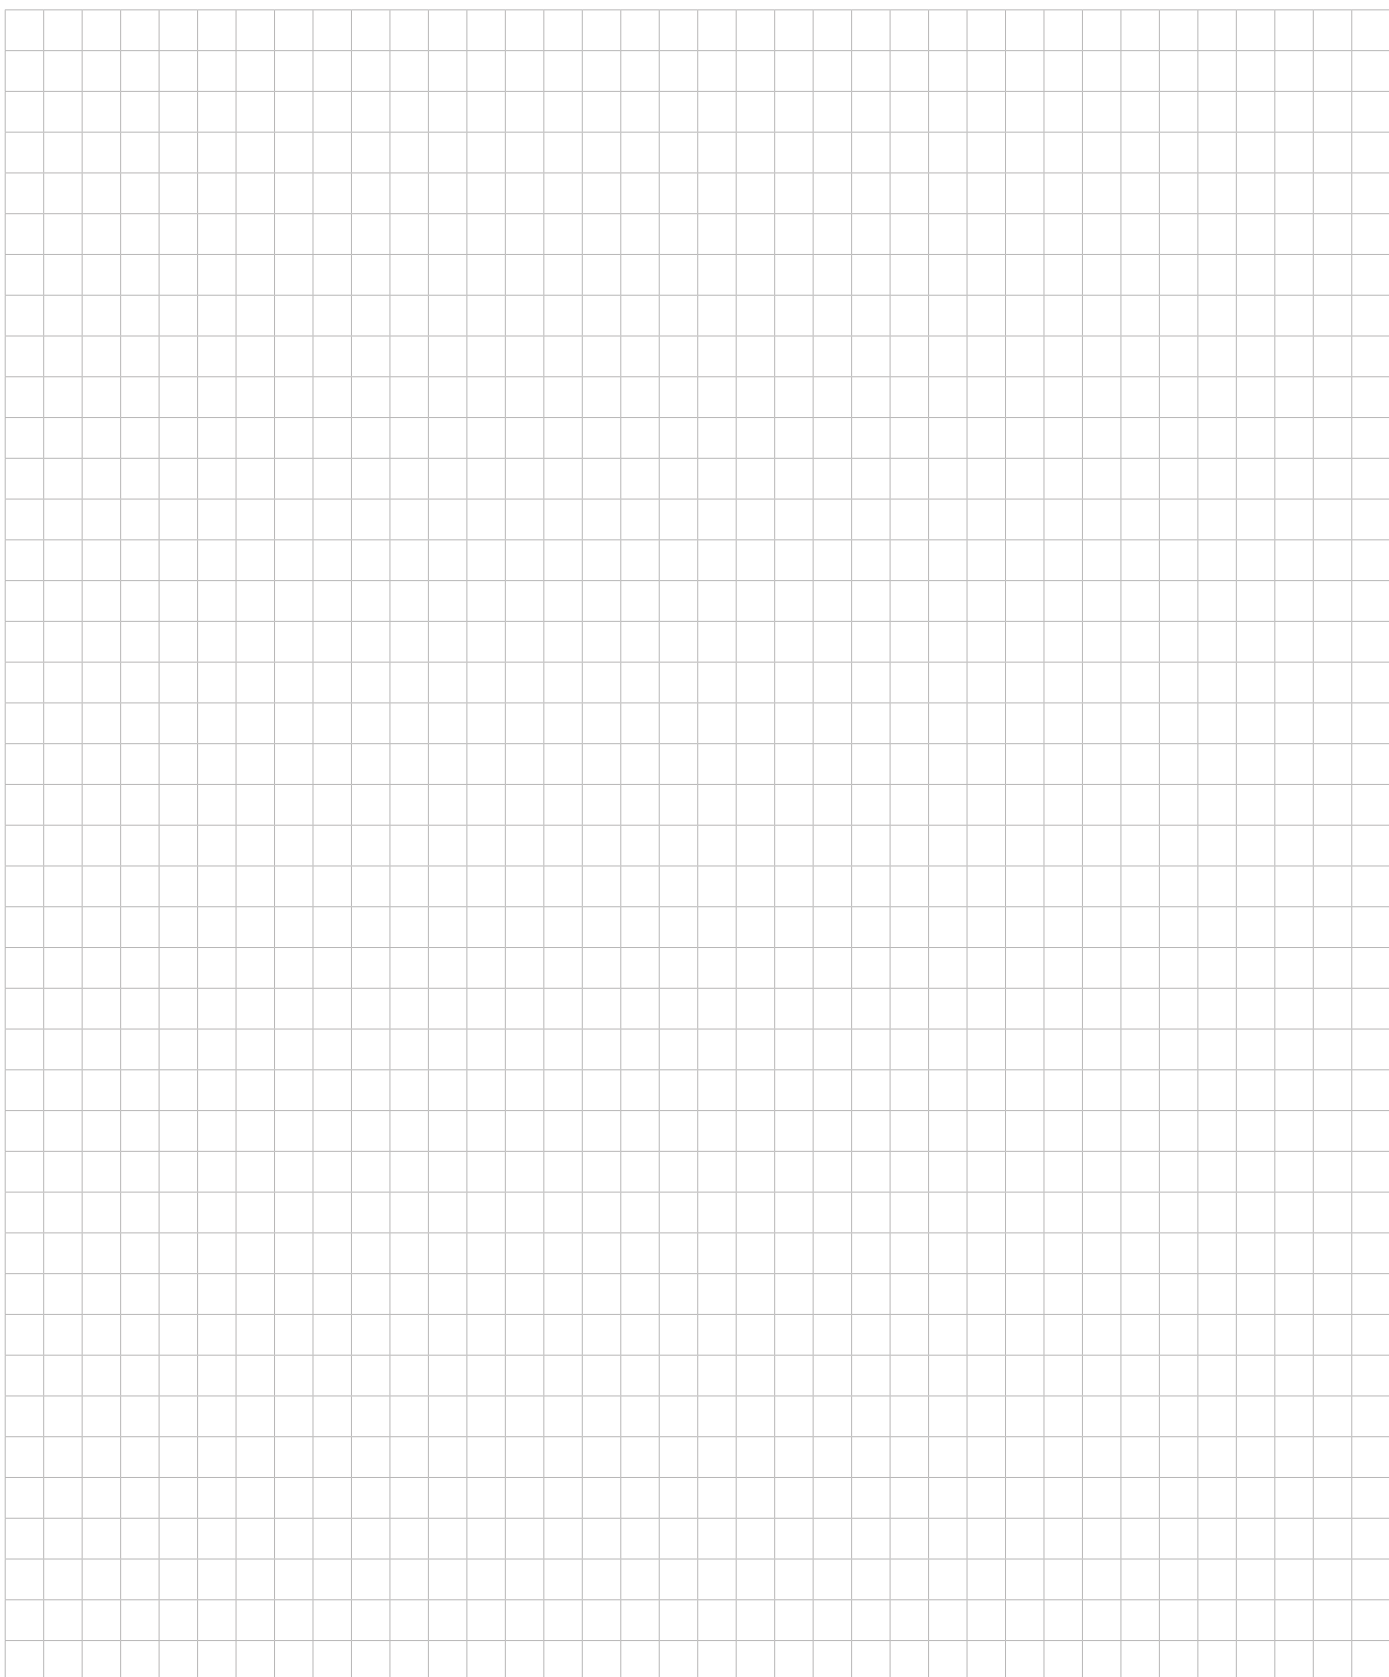

heimatec.u-tec®

heimatec.com

Products / Tool change systems /
u-tec® Tool-changing system



versions see catalog



heimatec.easy-quick

heimatec.com

Products / Tool change systems /
easy-quick HT quick-changing system



versions see catalog



heimatec.Capto™

heimatec.com

Products / Tool change systems /
heimatec.Capto™ quick-changing system



versions see catalog



heimatec.accessories

heimatec.com

Products / Accessories



versions see catalog





● heimatec overseas branches

○ global representations of heimatec

heimatec[®]

heimatec GmbH
Präzisionswerkzeuge
Carl-Benz-Str. 4
77871 Renchen
Germany

T +49 7843 9466 0
www.heimatec.com
info@heimatec.com

Please find the contact details of our worldwide trading partners on our website:
<https://heimatec.com/business-partners>