

Biglia
B 42-SM/S2M



High-tech from heimatec - heimatec - Tools and systems for productive turning and milling

heimatec belongs to the international technology and quality leaders for precision tools and specializes in the development and production of high-precision static and live tools for all CNC lathes, CNC turn-/mill machines and CNC machining centers.

The range of products* spans from static BMT and VDI tool holders, live tools up to highly complex customer-specific individual solutions. heimatec, headquartered in Renchen, has a own subsidiary in Asia and India and numerous representatives as well as trading partners all over the world.

***OUR PRODCUTS**

Static tool holders

Live tool units

Precision tools

Tools for turning and machining centres

Tools for swiss type lathes

Tool changing and uick-change systems

Tool systems for gear production

Digital tool management

This catalogue, including all its parts, is protected by copyright. Any use outside the restricted limitations of the Copyright Act without the consent of heimatec is inadmissible and liable to prosecution. This applies in particular to duplication, translation, microfilming and storage and processing in electronic systems.

heimatec GmbH reserves the right to make technical changes at any time without giving prior notice. This applies in particular to adjustments at any time to meet new or changed international standards, or in case of further developments of our products or manufacturing processes.

The current version of our General Terms and Conditions can be found on our website.

Part-#	Name	
8 010 25 004	Axial drilling and milling head ER 25	
	Weight [kg]:	1.500
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 25
	Gear ratio [i]:	1:1
	Torque max [Nm]:	25
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
8 010 25 146	Axial drilling and milling head ER 25 AX UT	
	Weight [kg]:	1.660
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 25 A - u-tec
	Gear ratio [i]:	1:1
	Torque max [Nm]:	25
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
	Please note:	stronger bearing
8 010 26 029	Axial drilling and milling head HT 4	
	Weight [kg]:	1.440
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	HT 4
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
8 012 24 003	Axial tapping head ER 20	
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 20
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
8 012 24 018	Axial tapping head WFLK 115 /A308	
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	WFLK 115
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	6000
	Rotating direction:	same

Part-#	Name	
	Coolant:	EXT
8 018 24 001	Axial drilling and milling head ER 20	
	Notation:	Y-axes adjustable
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 20
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	5000
	Rotating direction:	opposite
	Coolant:	EXT
8 030 25 008	Radial drilling and milling head ER 25	
	Weight [kg]:	2.560
	Version:	right
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 25
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	6000
	Rotating direction:	opposite
	Coolant:	EXT
	Center distance [mm]:	54
8 030 25 045	Radial drilling and milling head ER 25 IC	
	Weight [kg]:	2.990
	Version:	right
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 25
	Gear ratio [i]:	1:1
	Torque max [Nm]:	16
	Rotation max [1/min]:	6000
	Rotating direction:	opposite
	Coolant:	IC/Ext
	Pressure max [bar]:	140
	Center distance [mm]:	54
8 033 25 000	Radial drilling and milling head ER 25	
	Weight [kg]:	3.600
	Notation:	offset
	Version:	right
	Tool drive:	Flat (~DIN 1809)
	Shank size [mm]:	30.00
	Shank type:	VDI
	Tool adaption:	ER 25
	Gear ratio [i]:	1:1
	Torque max [Nm]:	25
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	75

Part-#	Name
8 033 25 014	Radial drilling and milling head ER 25
	Weight [kg]: 4.590
	Notation: offset
	Version: right
	Tool drive: Flat (~DIN 1809)
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: ER 25
	Gear ratio [i]: 2:1
	Torque max [Nm]: 32
	Rotation max [1/min]: 3000
	Rotating direction: same
	Coolant: EXT
	Center distance [mm]: 87
8 033 25 099	Radial drilling and milling head ER 25
	Weight [kg]: 3.360
	Notation: offset
	Version: right
	Tool drive: Flat (~DIN 1809)
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: ER 25
	Gear ratio [i]: 1:1
	Torque max [Nm]: 25
	Rotation max [1/min]: 6000
	Rotating direction: same
	Coolant: EXT
	Center distance [mm]: 75
8 033 25 104	Radial drilling and milling head ER 25 AX UT
	Weight [kg]: 3.530
	Notation: offset
	Version: right
	Tool drive: Flat (~DIN 1809)
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: ER 25 A - u-tec
	Gear ratio [i]: 1:1
	Torque max [Nm]: 25
	Rotation max [1/min]: 6000
	Rotating direction: same
	Coolant: EXT
	Please note: stronger bearing
	Center distance [mm]: 75
8 037 29 026	Radial disk mill head shaft diameter 10-22
	Tool drive: Flat (~DIN 1809)
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: Interchangeable arbor
	Gear ratio [i]: 3:1
	Torque max [Nm]: 50
	Rotation max [1/min]: 2000
	Rotating direction: opposite
	Coolant: EXT
	Please note: Price without arbor

Part-#	Name
8 040 25 028	Universal head $\pm 90^\circ$ adjustable ER 25 AX UT
	Weight [kg]: 4.610
	Version: right
	Tool drive: Flat (~DIN 1809)
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: ER 25 A - u-tec
	Gear ratio [i]: 1:1
	Torque max [Nm]: 25
	Rotation max [1/min]: 6000
	Rotating direction: opposite
	Coolant: EXT
	Please note: stronger bearing
	Center distance [mm]: 87
8 210 26 011	Tool holder HT 4 IC
	Weight [kg]: 1.270
	Version: right
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: HT 4
	Coolant: IC/Ext
8 267 29 002	Bar pick-up with gripper jaw
	Weight [kg]: 2.960
	Tool drive: Hydraulic
	Shank size [mm]: 30.00
	Shank type: VDI
	Tool adaption: Chuck jaws


heimatec.u-tec®

heimatec.com

Products / Tool change systems /
u-tec® Tool-changing system



versions see catalog

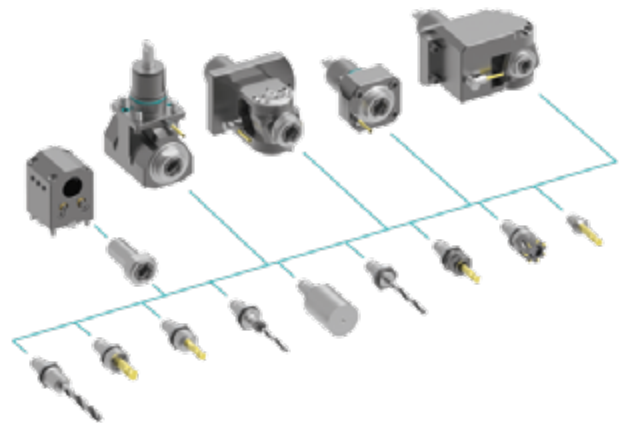


heimatec.easy-quick

heimatec.com

Products / Tool change systems /
easy-quick HT quick-changing system



versions see catalog

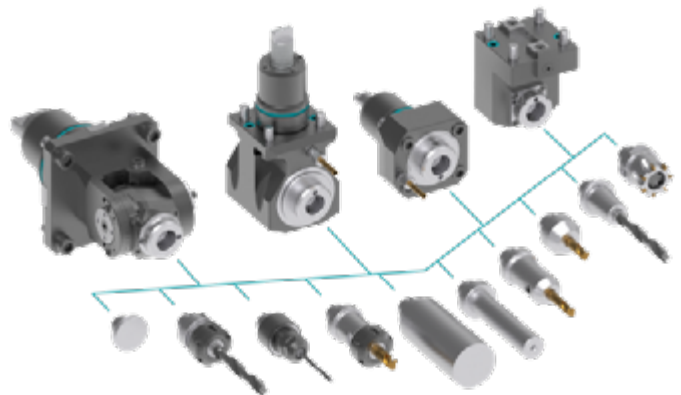


heimatec.Capto™

heimatec.com

Products / Tool change systems /
heimatec.Capto™ quick-changing system



versions see catalog

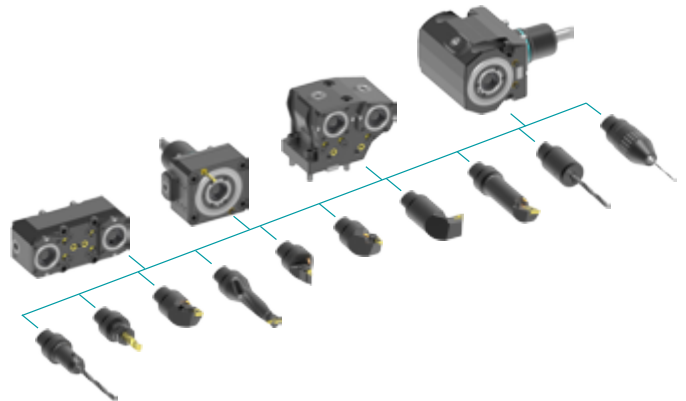

heimatec.accessories

heimatec.com

Products / Accessories



versions see catalog





● heimatec overseas branches

○ global representations of heimatec

heimatec[®]

heimatec GmbH
Präzisionswerkzeuge
Carl-Benz-Str. 4
77871 Renchen
Germany

T +49 7843 9466 0
www.heimatec.com
info@heimatec.com

Please find the contact details of our worldwide trading partners on our website:
<https://heimatec.com/business-partners>