

Emco

**ET 325 II TCM -  
Antrieb mit  
Zahnrad**



# High-tech from heimatec - heimatec - Tools and systems for productive turning and milling

heimatec belongs to the international technology and quality leaders for precision tools and specializes in the development and production of high-precision static and live tools for all CNC lathes, CNC turn-/mill machines and CNC machining centers.

The range of products\* spans from static BMT and VDI tool holders, live tools up to highly complex customer-specific individual solutions. heimatec, headquartered in Renchen, has a own subsidiary in Asia and India and numerous representatives as well as trading partners all over the world.

## \*OUR PRODCUTS

Static tool holders

Live tool units

Precision tools

Tools for turning and machining centres

Tools for swiss type lathes

Tool changing and uick-change systems

Tool systems for gear production




Digital tool management

This catalogue, including all its parts, is protected by copyright. Any use outside the restricted limitations of the Copyright Act without the consent of heimatec is inadmissible and liable to prosecution. This applies in particular to duplication, translation, microfilming and storage and processing in electronic systems.

**heimatec GmbH** reserves the right to make technical changes at any time without giving prior notice. This applies in particular to adjustments at any time to meet new or changed international standards, or in case of further developments of our products or manufacturing processes.

The current version of our General Terms and Conditions can be found on our website.

## ET 325 II TCM - Antrieb mit Zahnrad

Part-#	Name	
<b>8 010 03 000</b>	<b>Axial drilling and milling head ER 11</b>	
	Weight [kg]:	0.700
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 11
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
<b>8 010 04 000</b>	<b>Axial drilling and milling head ER 16</b>	
	Weight [kg]:	0.690
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 16
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
<b>8 011 03 000</b>	<b>Axial milling head arbor 13</b>	
	Tool drive:	Gear
	Shank type:	VDI
	Tool adaption:	Arbor 13
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	6000
	Rotating direction:	same
	Coolant:	EXT
<b>8 019 03 000</b>	<b>Axial drilling and milling head ER 11</b>	
	Weight [kg]:	1.110
	Notation:	offset
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 11
	Gear ratio [i]:	1:2
	Torque max [Nm]:	3
	Rotation max [1/min]:	12000
	Rotating direction:	opposite
	Coolant:	EXT
	Please note:	stronger bearing
	Offset [mm]:	20
<b>8 033 03 001</b>	<b>Radial drilling and milling head ER 11</b>	
	Weight [kg]:	1.220
	Notation:	offset
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI

## ET 325 II TCM - Antrieb mit Zahnrad

Part-#	Name	
	Tool adaption:	ER 11
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	8000
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	50
<b>8 033 03 002</b>	<b>Radial drilling and milling head ER 11</b>	
	Weight [kg]:	1.300
	Notation:	offset
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 11
	Gear ratio [i]:	1:1,556
	Torque max [Nm]:	4
	Rotation max [1/min]:	12000
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	50
<b>8 033 04 001</b>	<b>Radial drilling and milling head ER 16</b>	
	Weight [kg]:	1.240
	Notation:	offset
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 16
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	8000
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	50
<b>8 033 04 005</b>	<b>Radial drilling and milling head ER 16 IC</b>	
	Notation:	offset
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 16
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	8000
	Rotating direction:	same
	Coolant:	IC/Ext
	Pressure max [bar]:	25
	Center distance [mm]:	50

## ET 325 II TCM - Antrieb mit Zahnrad

Part-#	Name	
<b>8 040 03 000</b>	<b>Universal head ± 90° adjustable ER 11 AX</b>	
	Weight [kg]:	2.020
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 11 A
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	6300
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	74
<b>8 040 04 000</b>	<b>Universal head ± 90° adjustable ER 16</b>	
	Weight [kg]:	2.040
	Version:	right
	Tool drive:	Gear
	Shank size [mm]:	16.00
	Shank type:	VDI
	Tool adaption:	ER 16
	Gear ratio [i]:	1:1
	Torque max [Nm]:	6,3
	Rotation max [1/min]:	6300
	Rotating direction:	same
	Coolant:	EXT
	Center distance [mm]:	74



## heimatec.u-tec®

heimatec.com

Products / Tool change systems /  
u-tec® Tool-changing system



versions see catalog



## heimatec.easy-quick

heimatec.com

Products / Tool change systems /  
easy-quick HT quick-changing system



versions see catalog




## heimatec.Capto™

heimatec.com

Products / Tool change systems /  
heimatec.Capto™ quick-changing system



versions see catalog

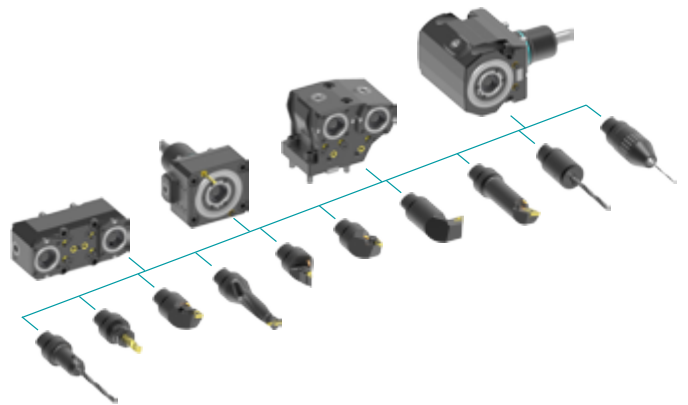

## heimatec.accessories

heimatec.com

Products / Accessories



versions see catalog





● heimatec overseas branches

○ global representations of heimatec

**heimatec**<sup>®</sup>

**heimatec GmbH**  
Präzisionswerkzeuge  
Carl-Benz-Str. 4  
77871 Renchen  
Germany

T +49 7843 9466 0  
[www.heimatec.com](http://www.heimatec.com)  
[info@heimatec.com](mailto:info@heimatec.com)

Please find the contact details of our worldwide trading partners on our website:  
<https://heimatec.com/business-partners>